


# RIFF JTAG Error codes and troubleshooting

## ERROR: DCC Loader has reported Error Code = 0x3E (0x007FFF 0x010000)

ERROR: DCC Loader has reported Error Code = 0x3E (0x007FFF <> 0x010000)

This is returned by DCC loader in case that eMMC internal controller fails to erase/write specific block. Usually it means that eMMC chip has failed, and can not be recovered by software means.

Solution is very simple - solder new eMMC chip, repartition it and repair bootloader.

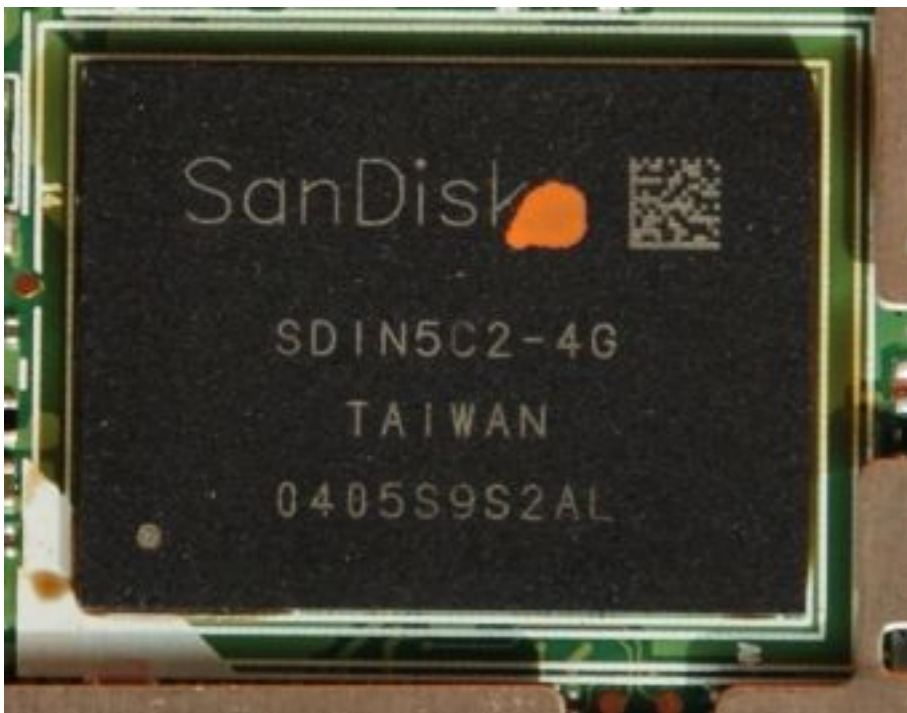

Unique solution ID: #1048

Author: Legija

Last update: 2012-04-30 19:07