

# RIFF JTAG Error codes and troubleshooting

## ERROR: No response from the RIFF Box.

**ERROR: No response from the RIFF Box.**


Can happen due to numerous of reasons. Mostly it's caused by wrongly configured RTCK/TCK sampling value, or badly connected device. In some cases it can be caused by hardware failure on target device.

### **Solutions:**


- Adjust RTCK/TCK sampling to lower value
- Recheck connection
- Check device hardware for problems

How to set RTCK/TCK :

# RIFF JTAG Error codes and troubleshooting

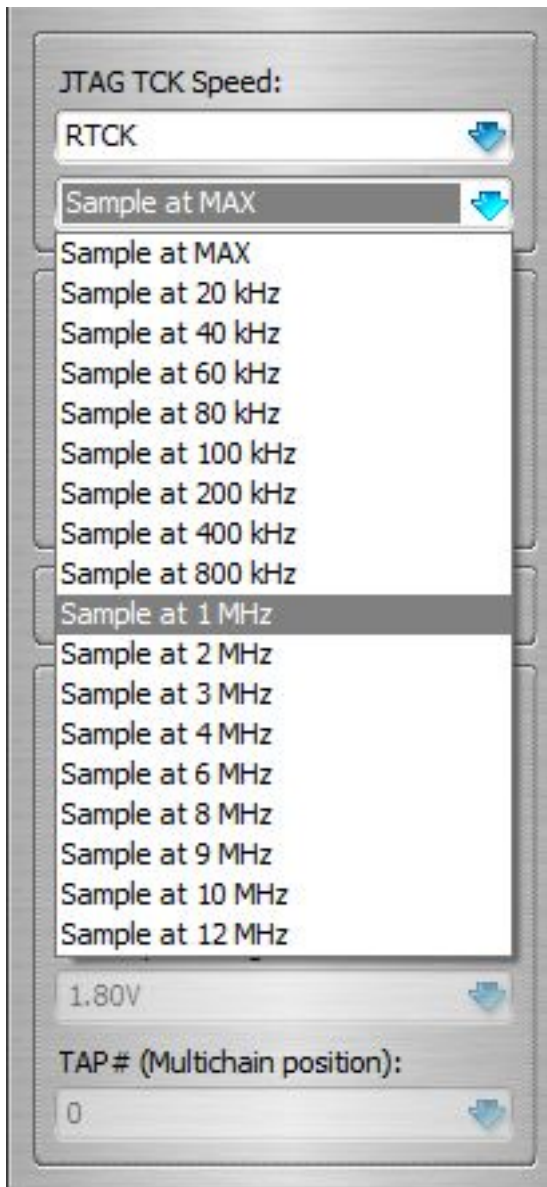

# RIFF JTAG Error codes and troubleshooting

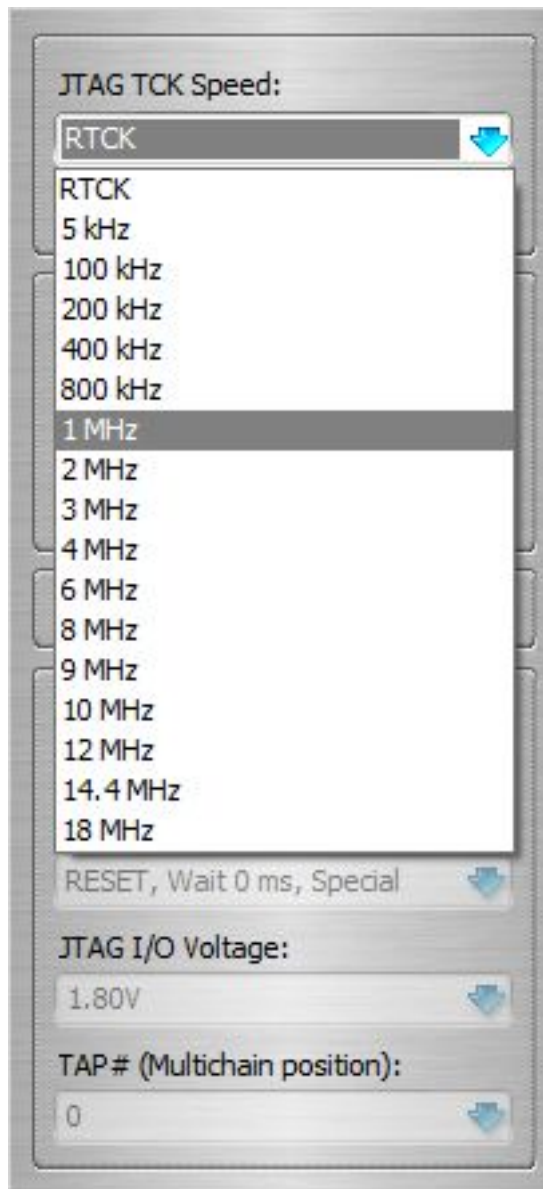

Unique solution ID: #1042

Author: Legija

Last update: 2012-04-28 15:56