RIFF JTAG Error codes and troubleshooting

WARNING: Erasing Error (0x24)

2.4. Error code 0x24

Returned by the DCC Loader when it fails to erase flash memory’s logical block. **This is not an abnormal situation for NAND memories** – bad blocks are sometimes appear due to specific NAND memory’s technology. User shall select how to handle block erase error in the JTAG Manager – for this user must be familiar with bad blocks handling techniques in general.

Solution:

Set up bad blocks handling method in Box Service -> Advanced settings:

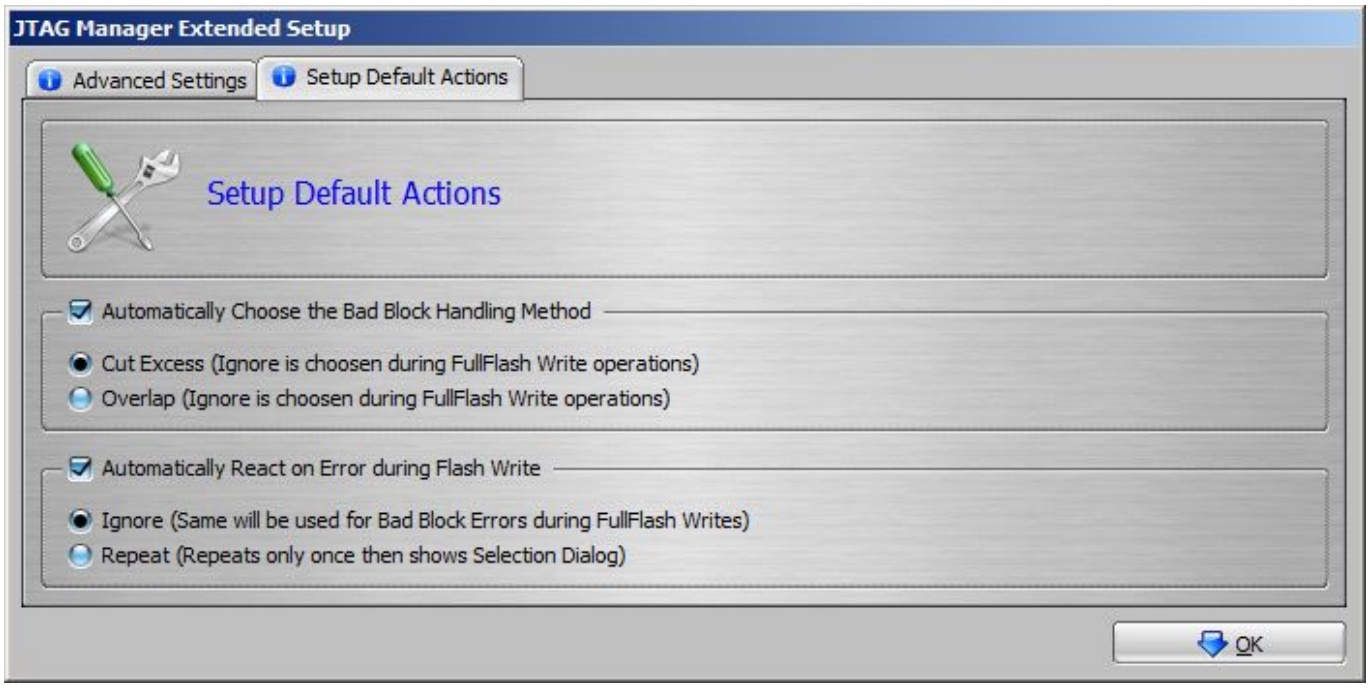

Unique solution ID: #1023
Author: Legija
Last update: 2013-05-20 16:34

(c) 2026 Legija <> | 2026-11-23 23:33
URL: https://faq.riffbox.org/content/4/24/en/warning-erasing-error-0x24.html